


Operator  
Telephone  
Fax  
e-Mail

## 1.06 / Summary

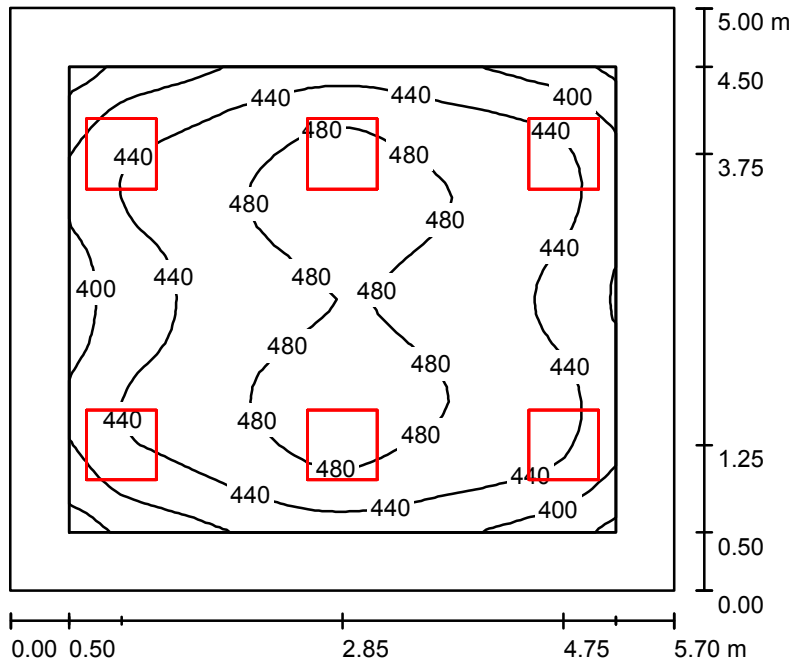

Height of Room: 3.100 m, Mounting Height: 3.100 m, Maintenance factor: 0.90

Values in Lux, Scale 1:65

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$
Workplane	/	449	343	509	0.763
Floor	20	344	227	418	0.660
Ceiling	70	99	70	119	0.701
Walls (4)	50	232	86	427	/

### Workplane:

Height: 0.800 m  
Grid: 32 x 32 Points  
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.545, Ceiling / Working Plane: 0.221.  
Proportion of points with less than 400 lx (for IEQ-7): 8.79%.

### Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	$\Phi$ (Luminaire) [lm]	$\Phi$ (Lamps) [lm]	P [W]
1	6	OCTA-LIGHT PLC OCTL-OLS-30-RNWR (1.000)	3040	3100	28.0
Total:			18239	18600	168.0

Specific connected load:  $5.89 \text{ W/m}^2 = 1.31 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $28.50 \text{ m}^2$ )