


Operator
Telephone
Fax
e-Mail

1.08,01.10,1.16, 1.18. / Summary

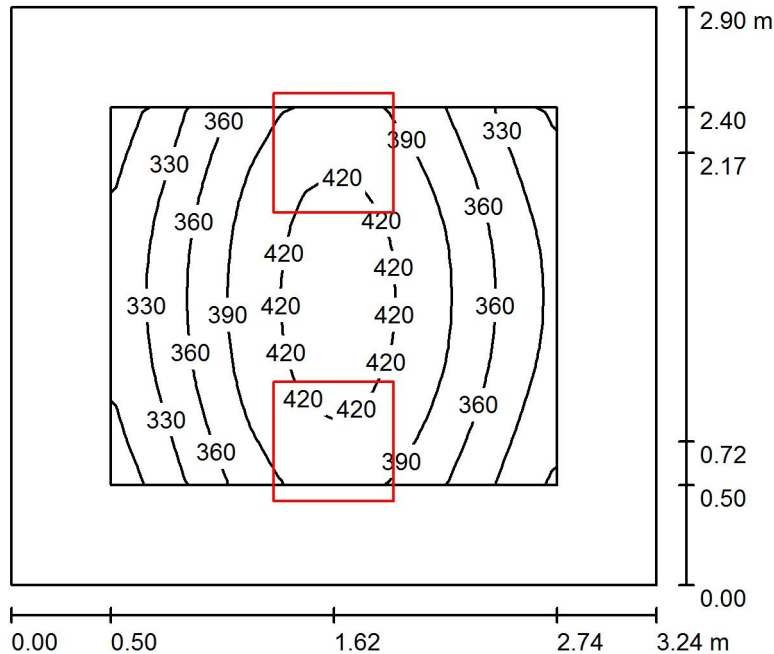

Height of Room: 3.000 m, Mounting Height: 3.000 m, Maintenance factor: 0.90

Values in Lux, Scale 1:38

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	374	285	434	0.763
Floor	20	238	168	294	0.705
Ceiling	70	87	53	122	0.611
Walls (4)	50	185	67	637	/

Workplane:

Height: 0.800 m
Grid: 16 x 16 Points
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.540, Ceiling / Working Plane: 0.233.
Proportion of points with less than 400 lx (for IEQ-7): 65.63%.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	2	OCTA-LIGHT PLC OCTL-OLS-30-RNWR (1.000)	3040	3100	28.0
Total:			6080	6200	56.0

Specific connected load: $5.96 \text{ W/m}^2 = 1.59 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 9.40 m^2)