


Operator
Telephone
Fax
e-Mail

Коридор 3.03,2.05 / Summary

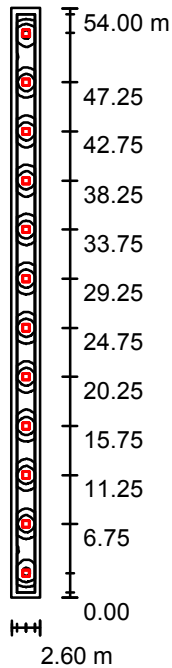

Height of Room: 3.150 m, Mounting Height: 3.150 m, Maintenance factor: 0.90

Values in Lux, Scale 1:696

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	146	105	181	0.723
Floor	20	135	80	173	0.594
Ceiling	70	38	28	48	0.748
Walls (4)	50	89	32	202	/

Workplane:

Height: 0.100 m
Grid: 128 x 8 Points
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.630, Ceiling / Working Plane: 0.260.
Proportion of points with less than 400 lx (for IEQ-7): 100.00%.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	12	OCTA-LIGHT PLC OCTL-OLS-30-RNWR (1.000)	3040	3100	28.0
Total:			36479	37200	336.0

Specific connected load: $2.39 \text{ W/m}^2 = 1.64 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 140.40 m^2)