


Operator
Telephone
Fax
e-Mail

Коридор 2 - 1.21, 2.20,3.21 / Summary

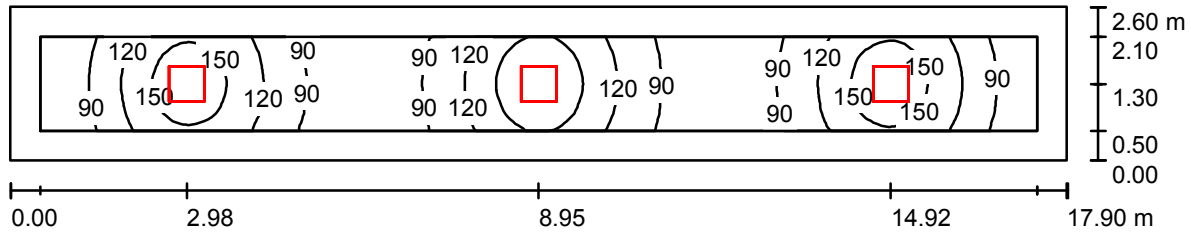

Height of Room: 3.000 m, Mounting Height: 3.000 m, Maintenance factor: 0.90

Values in Lux, Scale 1:128

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	113	61	171	0.542
Floor	20	101	47	163	0.467
Ceiling	70	28	16	39	0.575
Walls (4)	50	65	19	197	/

Workplane:

Height: 0.100 m
Grid: 128 x 16 Points
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.579, Ceiling / Working Plane: 0.252.
Proportion of points with less than 400 lx (for IEQ-7): 100.00%.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	3	OCTA-LIGHT PLC OCTL-OLS-30-RNWR (1.000)	3040	3100	28.0
Total:			9120	9300	84.0

Specific connected load: $1.80 \text{ W/m}^2 = 1.60 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 46.54 m^2)