


Operator
Telephone
Fax
e-Mail

Файл входу / Summary

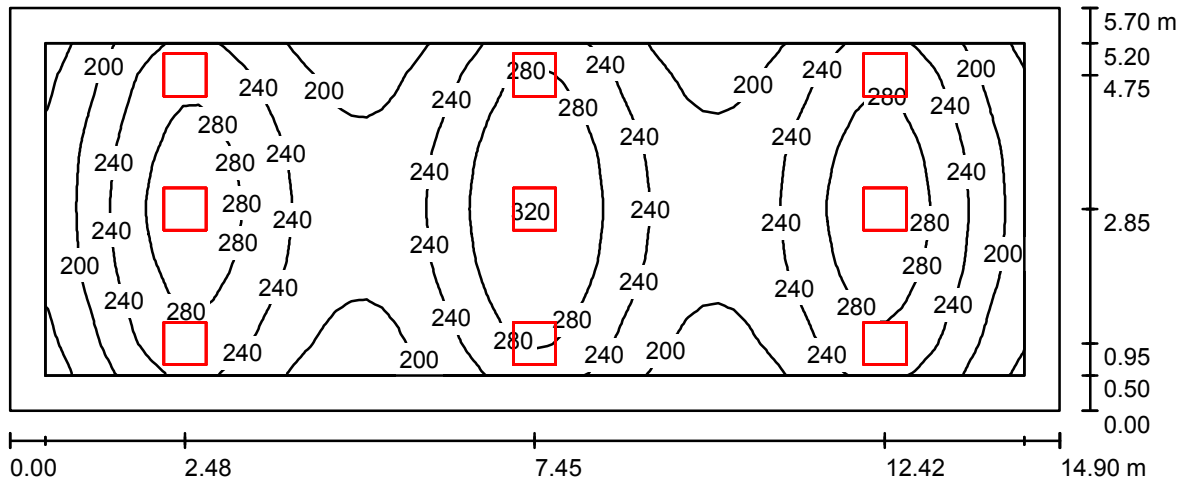

Height of Room: 3.000 m, Mounting Height: 3.000 m, Maintenance factor: 0.90

Values in Lux, Scale 1:107

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	241	144	323	0.598
Floor	20	223	115	315	0.518
Ceiling	70	54	36	84	0.672
Walls (4)	50	130	42	381	/

Workplane:

Height: 0.100 m
Grid: 64 x 32 Points
Boundary Zone: 0.500 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.535, Ceiling / Working Plane: 0.225.
Proportion of points with less than 400 lx (for IEQ-7): 100.00%.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	9	OCTA-LIGHT PLC OCTL-OLS-30-RNWR (1.000)	3040	3100	28.0
Total:			27359	27900	252.0

Specific connected load: $2.97 \text{ W/m}^2 = 1.23 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 84.93 m^2)