


Operator
Telephone
Fax
e-Mail

Фоайе 2.01, 3.01 / Summary

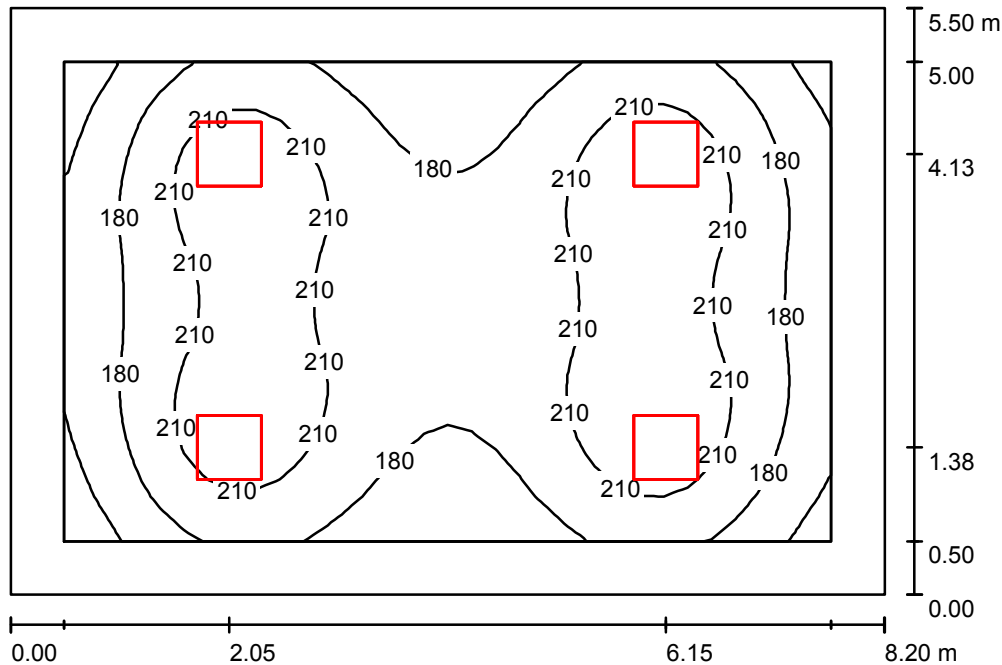

Height of Room: 2.900 m, Mounting Height: 2.900 m, Maintenance factor: 0.90

Values in Lux, Scale 1:71

| Surface | ρ [%] | E_{av} [lx] | E_{min} [lx] | E_{max} [lx] | u_0 |
|-----------|------------|---------------|----------------|----------------|-------|
| Workplane | / | 194 | 129 | 235 | 0.666 |
| Floor | 20 | 175 | 95 | 227 | 0.543 |
| Ceiling | 70 | 43 | 29 | 48 | 0.680 |
| Walls (4) | 50 | 101 | 35 | 200 | / |

Workplane:

| | |
|----------------|----------------|
| Height: | 0.100 m |
| Grid: | 32 x 32 Points |
| Boundary Zone: | 0.500 m |

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.520, Ceiling / Working Plane: 0.219.
Proportion of points with less than 400 lx (for IEQ-7): 100.00%.

Luminaire Parts List

| No. | Pieces | Designation (Correction Factor) | Φ (Luminaire) [lm] | Φ (Lamps) [lm] | P [W] |
|--------|--------|--|-------------------------|---------------------|-------|
| 1 | 4 | OCTA-LIGHT PLC OCTL-OLS-30-RNWR (1.000) | 3040 | 3100 | 28.0 |
| Total: | | | 12160 | 12400 | 112.0 |

Specific connected load: $2.48 \text{ W/m}^2 = 1.28 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 45.10 m^2)